

W43L100-MLA2FP

43" 4K2K UHD Defence Display



KEY FEATURES

- 43" Display with 4K2K UHD Rack Mount Display (3840 x 2160) native resolution
- AC 100~240V, Universal, $\pm 10\%$; DC 9~36V, $\pm 10\%$ (Optional)
- Compliant MILSTD 810G/ MILSTD 461E
- Convenient onscreen display controls
- Defence grade power connector (MILDTL38999/1)
- PCAP multitouch screen
- Rack mount mechanical design, supports VESA mount



SPECIFICATIONS

Display			
Touch / Glass	Projected Capacitive Multi Touch Screen PCAP with With ITO Flim (Optional)	Resolution	3840x2160
Size	42.5 inches	Contrast Ratio	4000:1
Panel Brightness	500.0 nits	Display Color	1.07B Colors
View Angles	89,89,89,89	Active Area	941.184x529.416 mm
Certification			
Certification	CE, FCC		
Environment			
Operating Humidity	10% to 95% RH	Operating Temperature	0~50°C
Storage Temperature	-10°C~60°C		
Compliance			
MIL-STD 461E/F/G	RE101 / RE102 CE101 / CE102 CS118 with EMI Glass / Touch(Optional) RS101 / RS 103 CS101 / CS 106 / CS 109 / CS 114 / CS 115 / CS 116	MIL-STD 810G/H	Vibration Method 514.6 Humidity Method 507.5 Transit Drop Method516.6
IO Ports			
USB Port	1 x USB for Touch Screen	Serial Port	1 x RS232 for Remote Control (Optional)
Video	1 x VGA 1 x DVI 1 x Display Port 1.2 1 x HDMI 1.4 (Optional) 1 x HDMI 2.0 (Optional)	Audio	1 x Audio Line In (Optional)
Mechanical			
Dimension	1088.2 x 681.4 x 84.6 mm	Weight	Metal
Mounting	VESA Mount/ Rack Mount	Enclosure	nan
Cooling System	Fanless Design		
Accessory			

Accessory

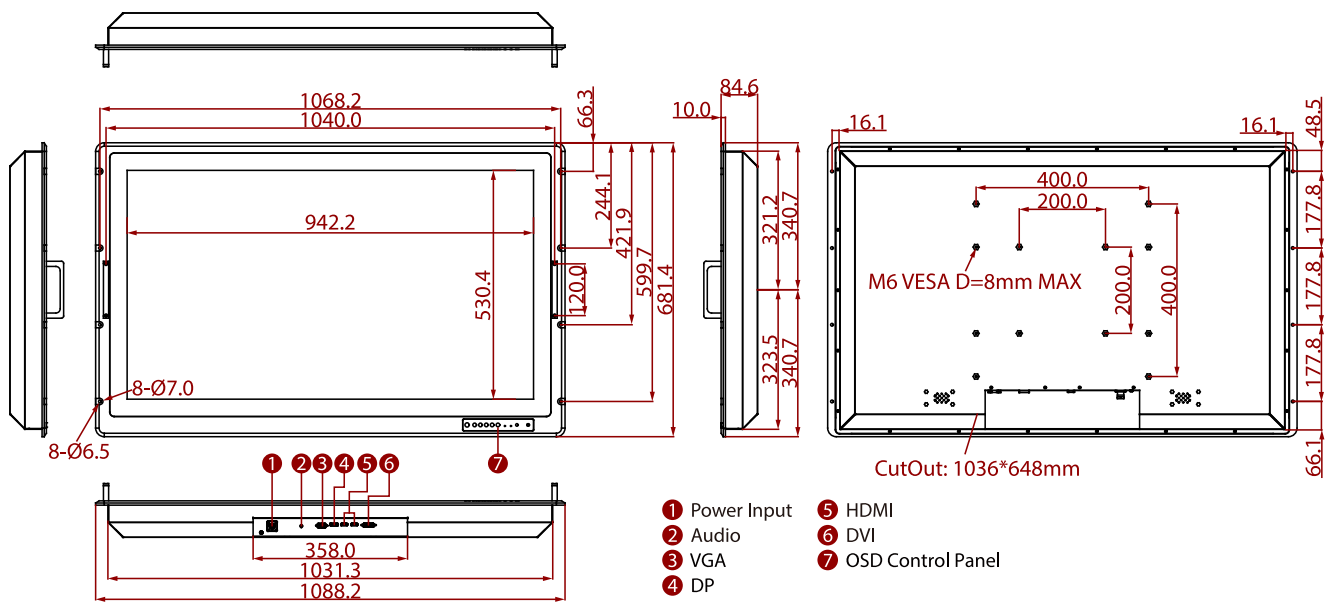
1 x User Manual(Hardcopy)
 1 x Power Cord MILDTL38999/1
 1 x VGA Cable
 1 x DVI Cable
 2 x HDMI Cable
 1 x DP Cable
 1 x USB Cable

Optional Accessory 1 x Audio cable**Power**

Power Rating AC 100~240V, Universal, ±10%
 DC 9~36V, ±10% (Optional)

Control

Button 5 x Capacitive Touch Key
 Power
 Brightness+
 Brightness-
 OSD/ Enter
 ESC

DIMENSIONS UNIT:MM**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.