

FM07E

7inch Windows Vehicle Mounted Computer with Intel Atom® x6413E



KEY FEATURES

- Intel Atom® x6413E Elkhart Lake, Windows Vehicle Mounted Computer
- 7" 1024 x 600 panel with projected capacitive Multi-Touch screen
- Wide power input 9-36V DC with ignition
- M12 waterproof connectors
- IP65 waterproof and dustproof
- Shock and vibration resistance according to MIL-STD-810G

INTRODUCTION

Winmate FM07E is a 7inch Windows Vehicle Mounted Computer with Intel Atom® x6413E engineered for warehouse logistics, fleet management, and forklift operations. It combines Intel® Celeron® N6211, 7-inch display with 1024x600 resolution, and IP65 to support reliable operation in harsh industrial environments. With MIL-STD-810G, the FM07E helps OEMs, system integrators, and project teams deploy durable, configurable solutions for demanding field, factory, and mission-critical applications.

SPECIFICATIONS

Display

Touch / Glass	Projected Capacitive Multi Touch Screen	Resolution	1024x0600
Size	7.0 inches	Contrast Ratio	800:1
Panel Brightness	1000.0 nits	View Angles	85,85,85,85
Active Area	152.2144x85.92 mm		

System Specification

Processor	Intel Atom x6413E 1.5GHz (up to 3GHz)	Memory	4GB (Default) 8GB (Optional) 16GB (Optional)
Storage	1 x M.2 2242 SSD 128GB (Default) 256GB (Optional) 512GB (Optional)	Ethernet controller	1 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 10 IoT Enterprise (64 bit) (Default) Windows 11 IoT Enterprise LTSC (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)
WLAN	Support	BT	Support
WWAN	4G/LTE (Optional)	GNSS	GPS, GLONASS


Environment

Operating Humidity	10% to 95% RH	Operating Temperature	-20°C~60°C
Storage Temperature	-20°C~60°C	Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I	IP rating	IP65, Dustproof and Waterproof

Certification

Certification		CE, FCC	
IO Ports			
USB Port	2 x USB for DB9 1 x Micro USB	Serial Port	1 x RS232/422/485 (Default RS232)
SIM Card Slot	1 x Micro SIM Card Slot	Audio	1x Speaker
LAN	1 x Gigabit Ethernet LAN 10/100/1000 Mbps (M12 type)	Front Control	5 x Function Key
Indicator	Power, HD	DIDO	DIDO (5XDI ; 3XDO)
CANBUS	2 x CANBUS		
Control			
Button	1 x Power Button, 5x Function Button (Programmable Function Key Configured by Winset)		
Mechanical			
Dimension	190 x 146 x 40 mm	Weight	1.25 kg
Mounting	RAM mount	Cooling System	Fanless Design
Accessory			
Accessory	User Guide M12 LAN Cable, 1.8m RS-232 Cable, 1.8m M12 Power Cable, 1.8m USB Cable, 0.3m CANBus and DIDO Cable, 1.8m WLAN Antenna Power Converter Cable Power Adapter	Optional Accessory	WWAN Antenna x 2 (Optional) Audio Cable, 0.3m (Optional) GPS Antenna, 3m (Optional)
Power			
Power Rating	9V-36V, with ignition control	Consumption	Max: 35W

DIMENSIONS UNIT:MM

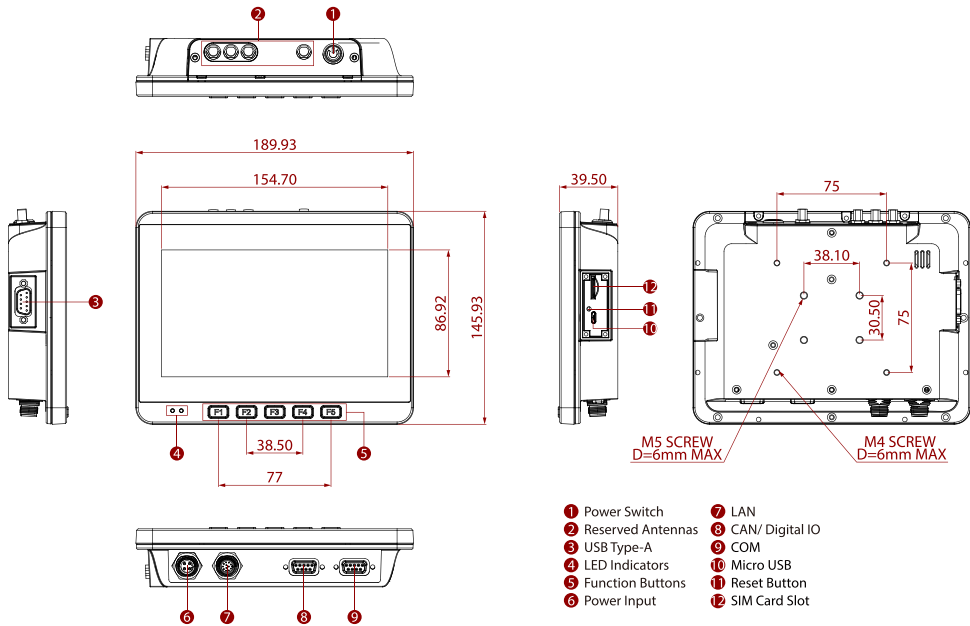

NOTE

1. Total usable memory will be less dependent upon actual system configuration.
2. Length measurements do not include protrusions. Weight varies with options.
3. Accessories may vary depending on your configuration.
4. This is a simplified drawing and some components are not marked in detail.
5. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
6. COM port can supply 5V power via the 9th pin.