

FM07MG

7" ARM A78 + A55 Android Vehicle Mounted PC



KEY FEATURES

- 7" 1024 x 600 panel with projected capacitive MultiTouch screen
- ARM 2 x A78 2.0GHz + 4 x A55 2.0GHz
- M12 waterproof connectors , IP65 waterproof and dustproof
- Wide power input 9-24V DC with ignition
- Shock and vibration resistance according to MIL-STD-810H

INTRODUCTION

The Winmate FM07MG is a 7-inch Android vehicle computer with a Genio 510 A78 + A55 CPU engineered for warehouse logistics, fleet management, and forklift operations. It combines an ARM Genio 510, 2 x A78 2.0 GHz + 4 x A55 2.0 GHz, a 7-inch display with 1024 x 600 resolution, and IP65 to support reliable operation in harsh industrial environments. With Android, the FM07MG helps OEMs, system integrators, and project teams deploy durable, configurable solutions for demanding field, factory, and mission-critical applications.

SPECIFICATIONS

Display

Touch / Glass	Projected Capacitive Multi Touch Screen	Resolution	1024x0600
Size	7.0 inches	Contrast Ratio	800:1
Panel Brightness	1000.0 nits	View Angles	85,85,85,85
Active Area	152.2144x85.92 mm		

System Specification

WLAN	Support	WWAN	4G/LTE (Optional)
GPS	GPS/GLONASS (Optional with WWAN only)	RFID	NFC (Optional)
Processor	ARM 2 x A78 2.0GHz + 4 x A55 2.0GHz	Memory	4GB LPDDR4
Storage	Onboard 64 GB	Operating System	Android 13 (Default) Linux Yocto 5.10.104 with QT 5.15 (Optional) Linux Ubuntu 22.04 (Optional)

Environment

Operating Humidity	10% to 95% RH	Operating Temperature	-20°C to 60°C
Storage Temperature	-20°C to 60°C	Shock	MIL-STD-810H Method 516.8 Procedure I
Vibration	MIL-STD-810H Method 514.8 Procedure I	IP rating	IP65

Certification

Certification	CE, FCC
---------------	---------

Control

Button	1 x Power Button, 5x Function Button (Programmable Function Key Configured by Winset)
--------	--

IO Ports

USB Port	2 x USB for DB9 1 X USB Type-C	Serial Port	1 x RS232/422/485 (Default RS232)
SD Card Slot	1 x Micro SD card slot (Max to 32GB)	SIM Card Slot	1 x SIM Card Slot (Optional)
Audio	1x Speaker	LAN	1 x LAN 10/100/1000 Mbps (M12 type)
Indicator	Power	DIDO	DIDO (5XDI ; 3XDO)
CANBUS	1 x CANBus		

Mechanical

Dimension	190 x 146 x 40 mm	Weight	1.25 kg
Mounting	RAM mount/ VESA mount	Cooling System	Fanless Design


Accessory

Accessory	User Guide M12 LAN Cable, 1.8m RS232 Cable, 1.8m M12 Power Cable, 1.8m USB Cable, 0.3m CANBus Cable, 1.8m WLAN Antenna x1 Power Converter Cable Power Adapter	Optional Accessory	WWAN Antenna x 2 (Optional) Audio Cable, 0.3m (Optional) GPS Antenna, 3m (Optional)
------------------	---	---------------------------	---

Power

Power Rating	9V~24V, with ignition control
---------------------	-------------------------------

DIMENSIONS UNIT:MM

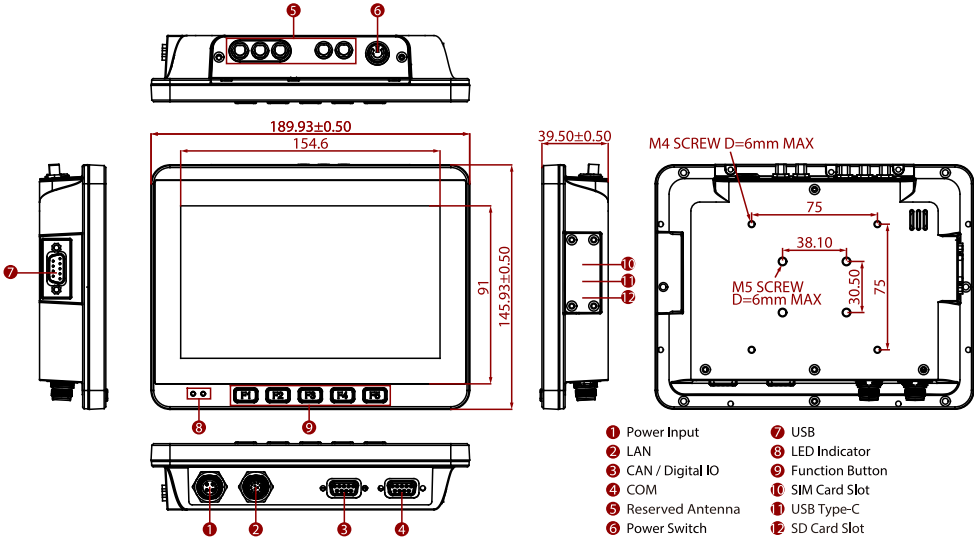

NOTE

- 1.This is a simplified drawing and some components are not marked in detail.
 - 2.Please contact our sales representative if you need further product information.
 - 3.All specifications are subject to change without prior notice.
 - 4.The product shown in this datasheet is a standard model.For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.
- * Some images or content on this page are created or enhanced using generative AI technology. All AI-generated content has been reviewed before publication.