

R15IT3S-GCC3(HB)

15" Intel® Core™ i5-1135G7 Standalone Panel PC HMI



KEY FEATURES

- 15" 1024 x 768 with P-CAP touchscreen
- High computing performance with Intel® Core™ i5-1135G7 2.4 GHz (turbo to 4.2GHz) processor
- Fanless cooling system and ultra-low power consumption
- Front IP65 for protection against water and dust
- A true flat, easy-to-clean front surface with edge-to-edge design
- Plenty of I/O, including 2 x LAN, 1 x COM, 2 x USB 3.0

INTRODUCTION

Winmate G-WIN GC Series Panel PC Series offers advanced performance and flexibility, with sizes ranging from 7" to 24" and support for various operating systems, including Windows and Android. Designed with a fanless cooling system and ultra-low power consumption, these panel PCs feature a front IP65-rated edge-to-edge flat design for water and dust resistance and easy cleaning. With versatile I/O options, including USB, HDMI, and RS232/422/485, these robust devices are ideal for industrial automation, kiosks, and control systems, ensuring reliability in harsh environments.

SPECIFICATIONS

Display

Touch / Glass	Projected Capacitive Multi Touch Screen	Resolution	1024x768
Size	15.0 inches	Contrast Ratio	2000:1
Panel Brightness	300 (Default) nits 1000 nits(Optional)	View Angles	88,88,88,88
Active Area	304.1x228.1 mm		

System Specification

Processor	Intel Core i5-1135G7 2.4GHz (up to 4.2GHz) (Default) Intel Core i5-1145G7 2.6GHz (up to 4.4GHz) (Optional)	Memory	4GB (Default) 8GB (Optional) 16GB (Optional) 32GB (Optional)
Storage	1 x M.2 M-Key 2242 SATA SSD or 1 x M.2 M-Key 2280 NVMe SSD 128GB (Default) 256GB (Optional) 512GB (Optional) 1TB(for NVMe) (Optional) 2TB(for NVMe) (Optional) 4TB(for NVMe) (Optional) 1 x SATA III , up to 2TB (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 11 IoT Enterprise SAC (64 bit) (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-20°C to 60°C	Shock	MIL-STD-810G Method 516.6 Procedure I

Vibration	MIL-STD-810G Method 514.6 Procedure I	IP rating	Front IP65
-----------	---------------------------------------	-----------	------------

Certification

Certification	CE, FCC
---------------	---------

IO Ports

USB Port	2 x USB 3.0	Serial Port	1 x RS232/422/485 (Default RS232) (Default) 1 x RS232 (Optional)
Video	1 x HDMI (Optional)	Audio	2 x Speaker
LAN	2 x RJ45		

Mechanical

Dimension	363.4 x 277.86 x 44.5 mm	Mounting	VESA mount Panel mount
Enclosure	Aluminum	Cooling System	Fanless Design

Accessory

Accessory	Quick Start Guide(Hardcopy) AC Adapter Power Cable
-----------	--


Power

Power Rating	12V DC input (Default) 9~36V DC input (Optional)
--------------	---

Control

Button	1 x Power Button 1 x Reset Button
--------	--------------------------------------

DIMENSIONS UNIT:MM

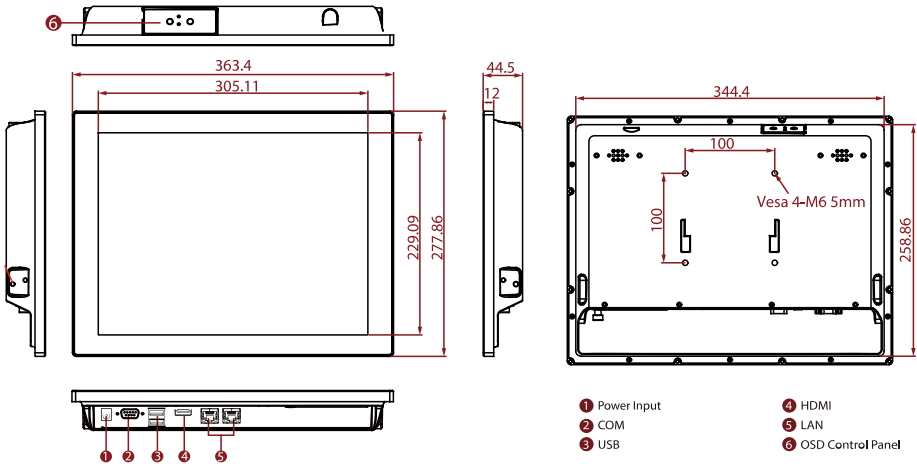

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.