

R21L100-CHM1

21.3" Chassis Display



CE

FCC

KEY FEATURES

- 21.3", 1600 x 1200
- VGA and HDMI input
- Chassis
- VESA mount

INTRODUCTION

Winmate Chassis Display Series offers durable and versatile display solutions for industrial and commercial applications. Available in sizes from 6" to 32", these wide, rectangular displays feature VGA and HDMI inputs, VESA mounting options, and optional high brightness up to 1500 nits for enhanced visibility. Designed for easy installation, they are ideal for control rooms, kiosks, and manufacturing environments, delivering reliable performance and seamless integration into various

SPECIFICATIONS

Display

Touch / Glass	Resistive Touch Screen (Optional) Protection Glass w/o Touch Function (Optional)	Resolution	1600x1200
Size	21.3 inches	Contrast Ratio	1800:1
Panel Brightness	1000.0 nits	Display Color	16.8M Colors
View Angles	89,89,89,89	Active Area	432x324 mm

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C		

Certification

Certification	CE, FCC
----------------------	---------

IO Ports

USB Port	1 x USB for Touch Screen	Video	1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional)
Audio	Audio line in (3.5mm) (Optional) 2 x Speaker (Optional)		

Mechanical

Dimension	491 x 360 x 65 mm	Mounting	VESA Mount
Enclosure	Metal	Cooling System	Fanless Design

Accessory

Accessory	1 x VGA cable 1 x HDMI cable	Optional Accessory	Remote Controller (Optional,Varies by product)
------------------	---------------------------------	---------------------------	--

100~240V AC to DC Adapter
Power Cord
Manual
VESA screws(Varies by product)


Power

Power Rating 12V DC in
24V DC in (optional)

Control

Button 5 Keys: -, +, Power, Esc, Enter

DIMENSIONS UNIT:MM

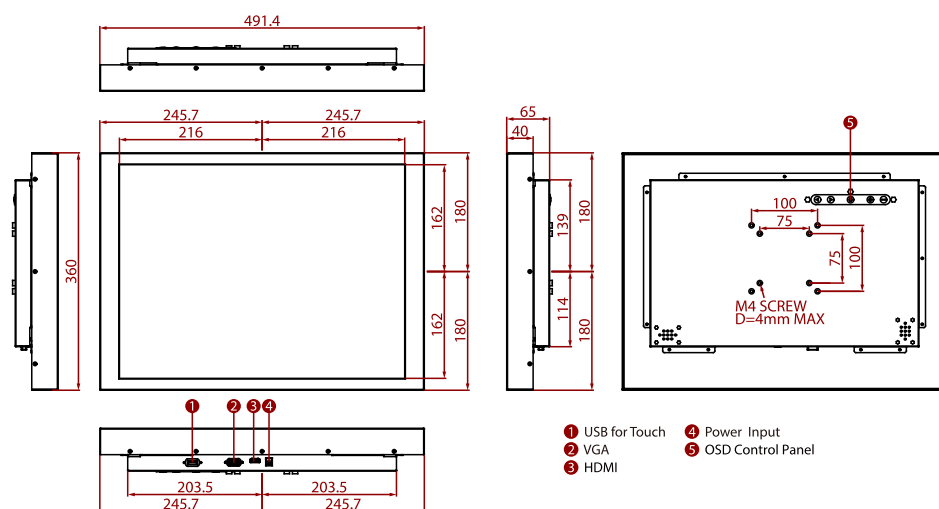

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.