

W22IF7T-GCA3

21.5" Intel® Core™ i3/i5/i7 G-WIN GC Series Front IP65 PCAP Panel PC



KEY FEATURES

- 21.5" 1920 x 1080 with P-CAP touchscreen
- Intel® 9th Generation Core™ i3/i5/i7 Processor (Coffee Lake Refresh)
- Front IP65 for protection against water and dust
- A true flat, easy-to-clean front surface with edge-to-edge design
- DP Support 4096 x 2304@60Hz
- HDMI Support 4096 x 2304@24Hz

INTRODUCTION

Winmate G-WIN GC Series Panel PC Series offers advanced performance and flexibility, with sizes ranging from 7" to 24" and support for various operating systems, including Windows and Android. Designed with a fanless cooling system and ultra-low power consumption, these panel PCs feature a front IP65-rated edge-to-edge flat design for water and dust resistance and easy cleaning. With versatile I/O options, including USB, HDMI, and RS232/422/485, these robust devices are ideal for industrial automation, kiosks, and control systems, ensuring reliability in harsh environments.

SPECIFICATIONS

Display

Resolution	1920x1080	Size	21.5 inches
Contrast Ratio	3000:1	Panel Brightness	250.0 nits
View Angles	89,89,89,89	Active Area	476.64x268.11 mm
Touch / Glass	Projected Capacitive Multi Touch Screen		

System Specification

Processor	Intel Core i7-9700TE 1.8GHz (up to 3.8GHz) (Default) Intel Core i5-9500TE 2.2GHz (up to 3.6GHz) (Optional) Intel Core i3-9100TE 2.2GHz (up to 3.2GHz) (Optional)	Chipset	Intel® Q370
Memory	2 x non-ECC SO-DIMM RAM, up to 64GB (32GB per DIMM)	Storage	128GB SSD(Default) (Default) 256GB SSD (Optional) 512GB SSD (Optional) 1TB (Optional) 2TB 2 x SATA III for 2.5" SSD/HDD support RAID 0,1 (Optional)
Ethernet controller	2 x Intel® Ethernet Controller	Security	TPM 2.0
Operating System	Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional)	WLAN	Support (Optional)
BT	Support (Optional)		

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-20°C to 60°C	Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I	IP rating	Front IP65

Certification

Certification	CE, FCC
---------------	---------

IO Ports

USB Port	4 x USB3.2 Gen.2x1 (Type-A)	Serial Port	1 x RS232/422/485 (Default RS232) 1 x RS232
Video	1 x DP1.2 (Default) 1 x HDMI 1.4 (Optional)	Audio	1 x Mic in 1 x Line out 2 x Speaker
Expansion Port	2 x M.2 slot(1 for WiFi, 1 for SSD) (Default) 1 x PCIe 16 (Optional)	LAN	2 x Giga LAN RJ45 Connector
Indicator	1 x LED Indicator for power 1 x LED Indicator for storage	Brightness Knob	1 x Brightness Adjustment Knob

Mechanical

Dimension	530 x 322 x 62 mm	Mounting	VESA mount Panel mount
Enclosure	Metal Housing with Plastic Bezel	Cooling System	Fan Design

Accessory

Accessory	Quick Start Guide(Hardcopy) AC Adapter Power Cable
-----------	--


Control

Button	1 x Power Button 1 x Reset Button
--------	--------------------------------------

Power

Power Rating	12V DC in
--------------	-----------

DIMENSIONS UNIT:MM

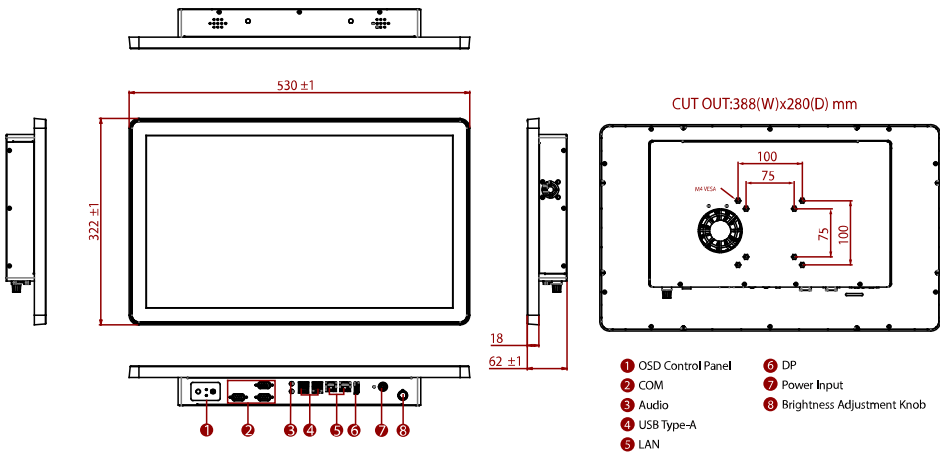

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.