# R15L100-SPC3

# 15" IP65 Stainless PCAP Chassis Display



## **KEY FEATURES**

- 15", 1024x768
- Support VESA / YOKE mount
- Chassis
- Stainless housing SUS 316 / AISI 316
- Full IP65 waterproof and dustproof
- Optical bonding (optional)



# **SPECIFICATIONS**

Display				
Resolution	1024x768	Size	15.0 inches	
Contrast Ratio	2000:1	Panel Brightness	300.0 nits	
Display Color	16.2M Colors	View Angles	88,88,88,88	
Active Area	304.1x228.1 mm	Touch / Glass	Projected Capacitive Multi Touch Screen	
Mechanical				
Dimension	378 x 301 x 56.4 mm	Weight	6.3Kg	
Mounting	VESA Mount Yoke Mount	Enclosure	Stainless Housing	
Cooling System	Fanless design			
Environment				
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 45°C	
Storage Temperature	-20°C to 60°C	IP rating	IP65	
Certification				
Certification	CE, FCC			
IO Ports				
USB Port	1 x M12 waterproof connector for touch screen control	Video	1x M12 type connector for VGA input 1x waterproof connector for DVI input (Optional) 1x waterproof connector for HDMI input (Optional)	
Indicator	1 x LED Indicator for power 1 x LED Indicator for status			
Control				
Button	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button			
Accessory				
Accessory	100~240V AC to DC Adapter with waterproof connector Power Cord External LISP cable with waterproof connector for	Optional Accessory	External HDMI cable with waterproof connector (Optional) External DVI cable with waterproof connector	

External USB cable with waterproof connector for

(Optional)


touchscreen control External VGA cable with waterproof connector Waterproof caps Manual VESA screws

ь	_				
Р	റ	w	"	2	г.

Power Rating 12V DC (M12 type)

## **DIMENSIONS**

UNIT:MM

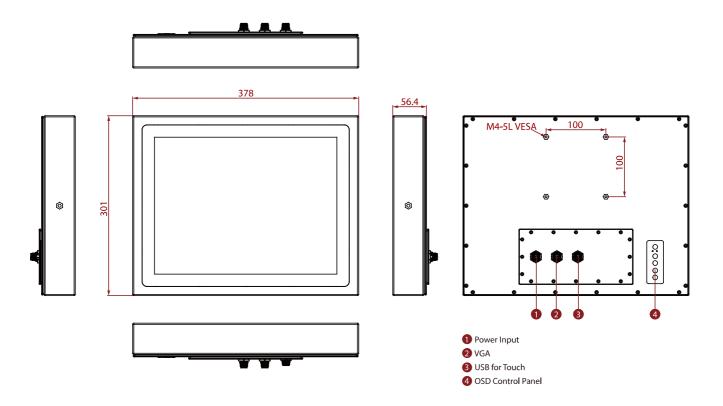

## **NOTE**

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.